


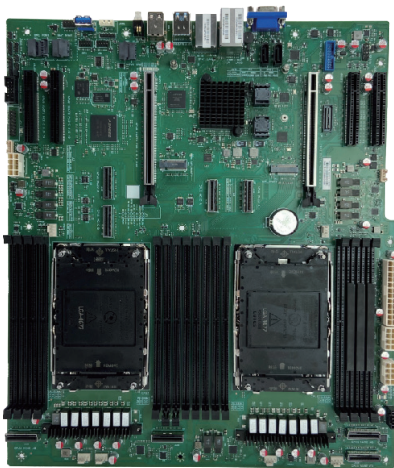

FEATURES

- Supports two high-performance 4th & 5th Gen Intel Xeon Scalable processors
- 16 DDR5 RDIMM slots, up to 4TB ECC RDIMM
- 10 SATA3(6Gb/s) interfaces and supports RAID 0, 1, 5, and 10, providing multiple storage solutions for enterprise applications
- 3 RJ45 network ports, two 2.5GbE ports, and one is an IPMI management interface
- 4 PCIe 5.0 x8 and 2 PCIe 5.0 x16 slots for flexiable

SPECIFICATIONS

System

CPU	2 x Socket supports 4th & 5th Gen Intel Xeon Scalable Processors
Chipset	Intel C741 Chipset
Memory	Slots, 16 slots, supports 4400/4800/5600MHz ECC DDR5 RDIMM Capacity, up to 4TB 3DS RDIMM, Size, 16G, 32G, 64G, 128G, 256G
Storage	10 x SATA3 6Gb/s ports, supports RAID 0/1/5/10, 2 x MiniSAS HD, 1 x M.2 2242/2280, 1 x M.2 2280
Networking	2 x RJ45, 10/100/1000/2500Mbps, 1 x RJ45, 10/100/1000Mbps, IPMI Management
Display	1 x VGA, chip ASPEED AST2600 BMC
Expansion	2 x PCIe 5.0 x16 slots(x16 slots), 4 x PCIe 5.0 x8(x8 slots), 4 x MCIO x8(reserved for NVMe), 4 x MCIO x8 (reserved for PCIe)
Onboard I/O	1 x Front COM Header, 1 x TPM Header, 6 x 4-pin Fan Connectors, 1 x Chassis Intrusion Detection, 1x 24-pin +3x 8-pin Power Connectors, 1 x USB 3.0 header (up to 2 ports), 1 x USB 2.0 header (up to 2 ports), 1 x USB 3.0 Type A, 1 x M.2 2242/2280, 1 x M.2 2280
Rear I/O	1 x VGA, 1 x IPMI, 2 x USB 2.0, 2 x USB 3.0, 2 x RJ-45 2.5G LAN, 1 x UID switch(LED)


Product Dimensions

Dimensions	360 x 315 mm (14.2 x 12.4 in)
------------	-------------------------------

Product Dimensions

Operating Temperature	0~35°C (32~95°F)
Storage Temperature	-40~70°C (-40~158°F)
Operating Humidity	8% ~ 90% (Non-condensing)
Storage Humidity	5% ~ 95% (Non-condensing)

I/O LAYOUT

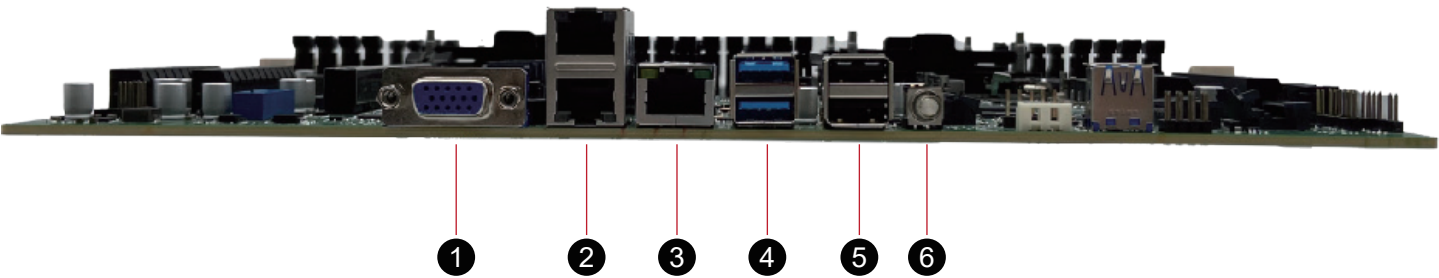

- 1 1 x VGA

5 1 x USB3.0 Type-A
- 2 2 x RJ45, 2500Mbps

6 1 x UID switch(LED)
- 3 1 x RJ45, 1000Mbps, IPMI
- 4 2 x USB3.0 Type-A

PRODUCT DIMENSIONS

unit: mm

