


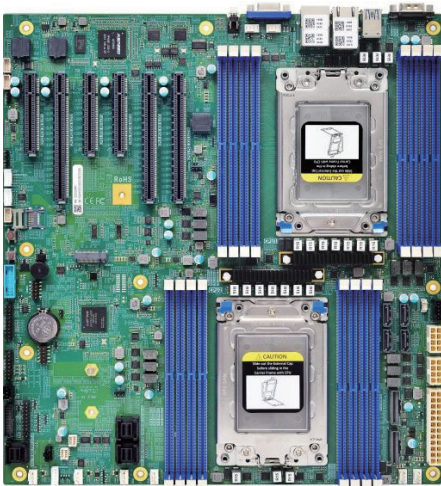

FEATURES

- Supports 2 AMD EPYC 7002/7003 series processors, with a single CPU having up to 64 cores and 128 threads
- Four xGMI interconnection links
- Supports 16 DDR4 memory, Max. 3200MHz
- Supports 12 on-board SATA 3.0
- Supports up to 4 U.2 NVMe, meeting the requirements of mainstream applications
- Supports 6 standard PCIe 4.0 expansion slots

SPECIFICATIONS

System

CPU	2 x AMD EPYC 7002/7003 series processors
Memory	16 x DDR4 3200MHz, supports RDIMM/ LRDIMM
Storage	12 x SATA3 6Gb/s ports, 1 x M.2 2280/22110 PCIe 4.0, 4 x NVMe (2 SlimSAS PCIe 4.0 x8)
Storage controller	Integrated 6Gb/s SATA controller, Supports external 12Gb/s SAS HBA and 12Gb/s SAS RAID controllers
Networking	2 x RJ45, 1000Mbps, support NCSI, 1 x RJ45, 1000Mbps, IPMI Management
Display	1 x VGA
Expansion	3 x PCIe 4.0 x16, 3 x PCIe 4.0 x8
Rear I/O	1 x VGA, 4 x USB 3.0, 2 x RJ-45 1G LAN, 1 x RJ-45 IPMI Management, 1 x COM, 1 x UID
Layout	EATX
Management function	Integrated with ASPEED AST2500 BMC management chip, it supports functions such as IPMI2.0, KVM, virtual media, etc
TPM	1 x LPC TPM header
FAN	8 x 4 pin fan interfaces, supporting automatic speed regulation
OS	Microsoft Windows Server, Red Hat Enterprise Linux, SUSE Linux Enterprise Server, CentOS, Ubuntu、 Oracle Linux、 VMware ESXi、 Citrix XenServer


Product Dimensions

Dimensions	12" x 13"
------------	-----------

Product Dimensions

Operating Temperature	5~35℃ (41~95℉)
Operating Humidity	8% ~ 90% (Non-condensing)

I/O LAYOUT

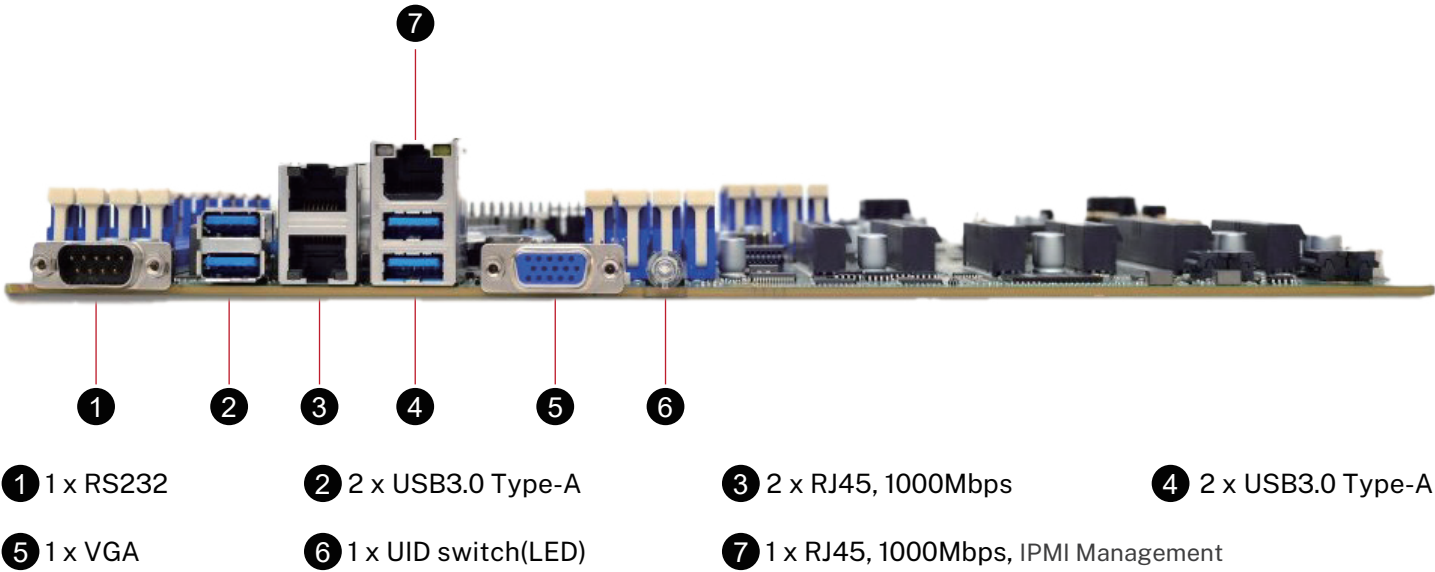

PRODUCT DIMENSIONS

unit: inch

