


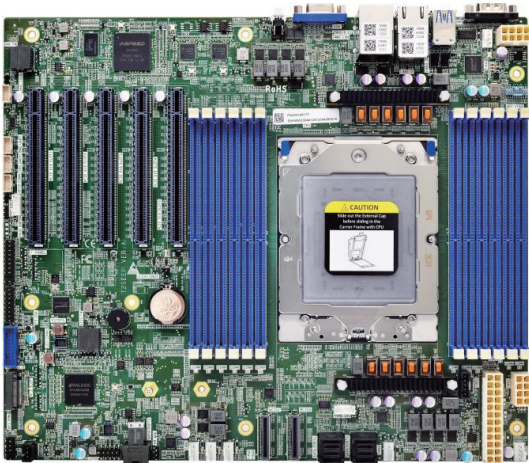

FEATURES

- Supports 1 AMD EPYCTM 9004 series processor, with a maximum TDP of 400W, and has strong computing performance
- Supports 12 DDR5 memory, Max. 4800MHz
- Supports 12 on-board SATA 3.0, 2 x MCIO (PCIe 5.0x8), supports 4 x NVMe, and 1 x M.2 SATA3.0/ PCIe 4.0 x4, 2280/22110
- Supports 5 standard PCIe 5.0 expansion slots

SPECIFICATIONS

System

CPU	1 x AMD EPYC 9004 series processors, Max. 400W
Memory	12 x DDR5, Max. 4800MHz, supports RDIMM/ 3DS RDIMM, up to 3TB
Storage	12 x SATA3 6Gb/s ports (3 x SFF-8643), 1 x M.2 SATA3.0/ PCIe 4.0 x4, 2280/22110, 2 x MCIO(PCIe 5.0 x8), supports 4 x NVMe
Networking	2 x RJ45, 1000Mbps, support NCSI, 1 x RJ45, 1000Mbps, IPMI Management
Display	1 x VGA
Expansion	5 x PCIe 5.0 x16
Rear I/O	1 x VGA, 4 x USB 3.0, 2 x RJ-45 1G LAN, 1 x RJ-45 IPMI Management, 1 x COM, 1 x UID
Layout	ATX
Management function	It integrates the BMC management chip AST2600, supporting functions such as IPMI2.0, Redfish, KVM, and virtual media, and provides one 1Gbps RJ45 dedicated management port
FAN	6 x 4 pin fan interfaces, supporting automatic speed regulation
OS	MSupport Microsoft Windows Server, Microsoft Hyper-V Server, Red Hat Enterprise Linux, SUSE LinuxEnterprise Server, CentOS, Ubuntu, Oracle Linux, VMware ESXi,Citrix XenServer and other mainstream operating systems


Product Dimensions

Dimensions	307.4x256.5 mm (12.1" x 10.1")
------------	--------------------------------

Product Dimensions

Operating Temperature	5~35℃ (41~95℉)
Storage Temperature	-40~65℃ (-40~149℉)
Operating Humidity	8% ~ 90% (Non-condensing)

I/O LAYOUT

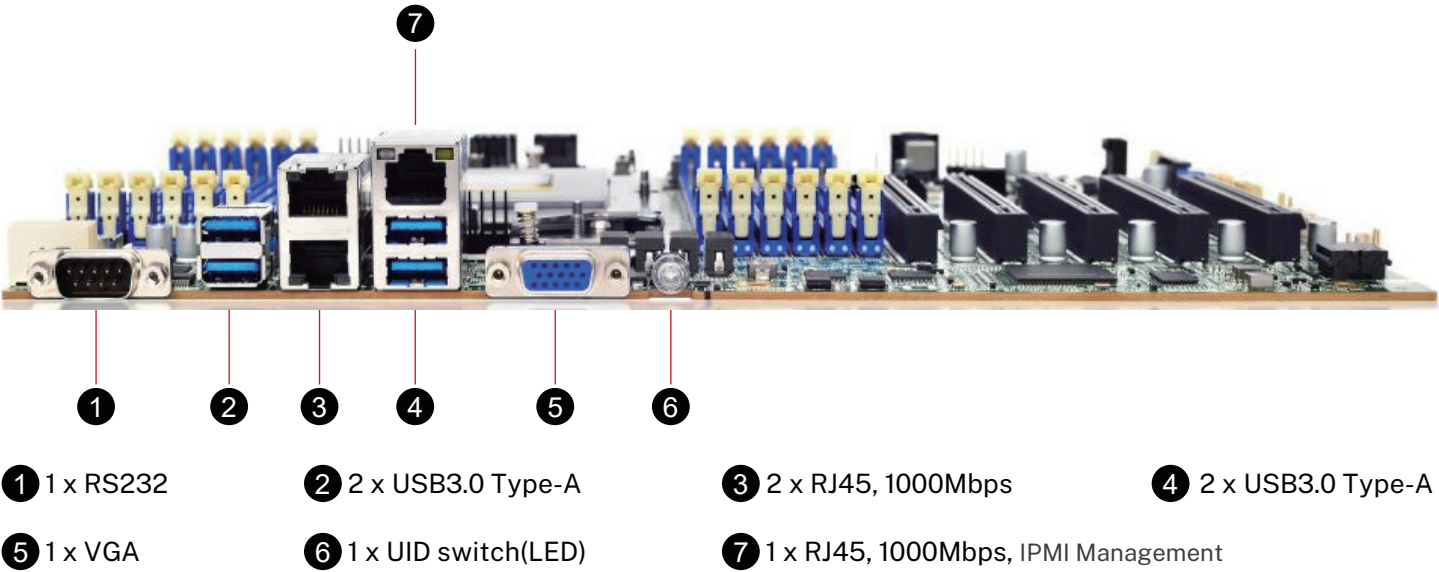

PRODUCT DIMENSIONS

unit: mm

